



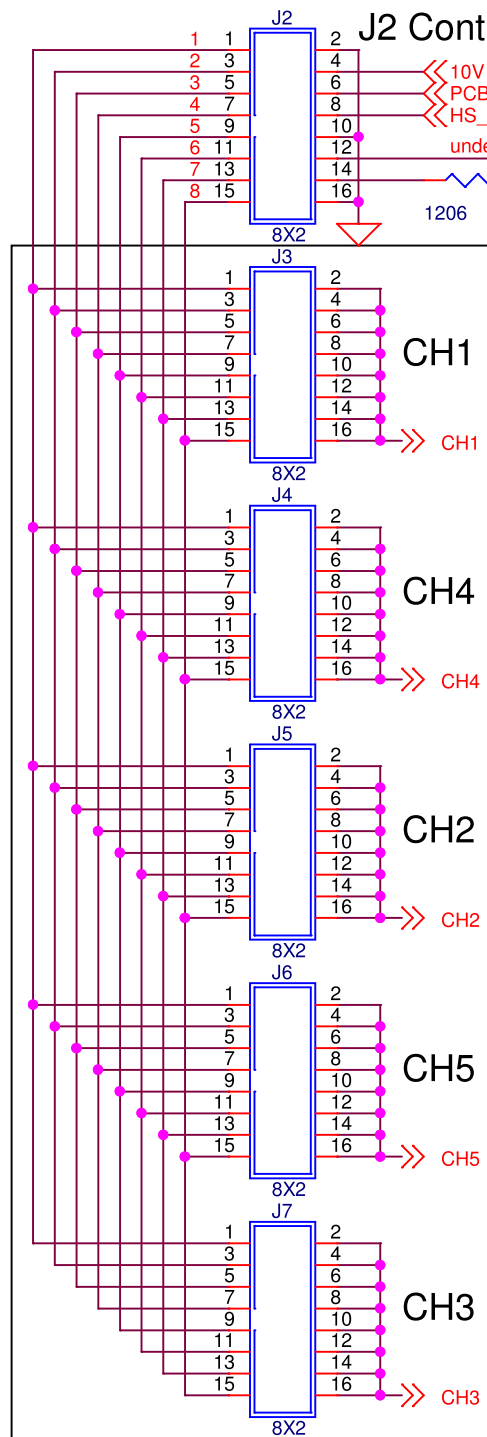

Control Channel to Output Channel Programming Headers (J3 - J7)

8 brightness control inputs on J2 (odd number pins).
 0 - 10V analog input (can be rescaled for lower voltages)
 Alternately, PWM may be used
 Some PWM frequencies may require an input cap change

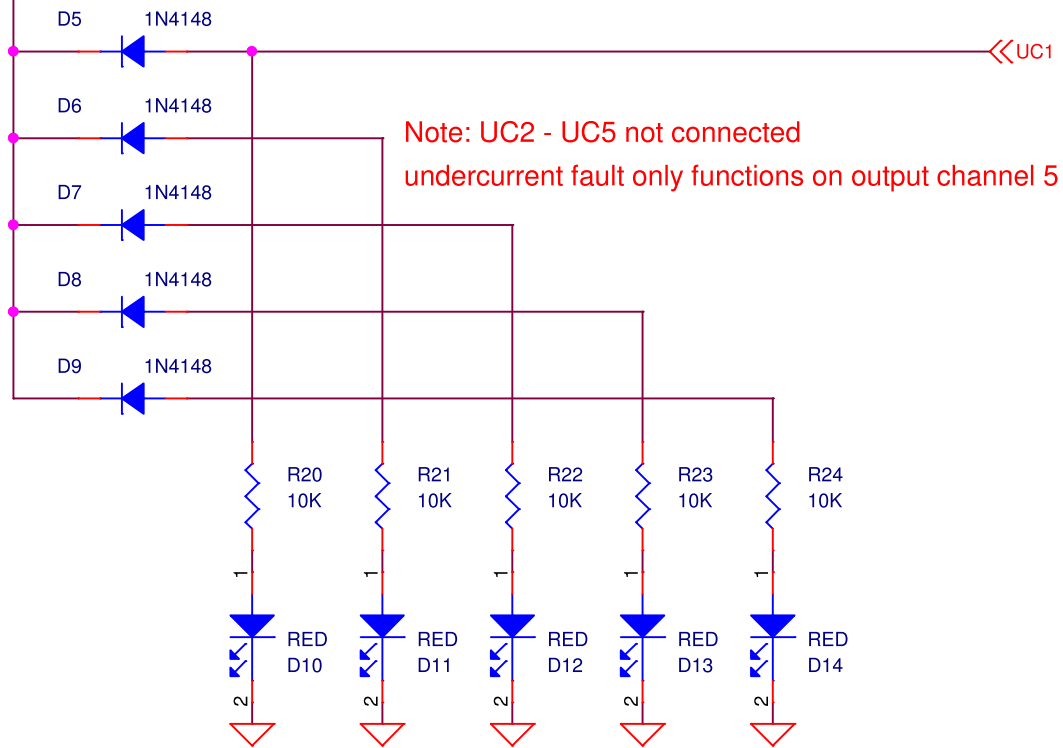

Under-Current Fault Indicators

Multiple 5 Channel LED Driver Boards can be controlled via daisy-chained ribbon cable
 Up to 8 independent Control Signals can be applied via Control Jack J2
 Control Channels 1-8 selected for Output Channels 1-5 via jumpers on Headers J3-J7
 Note: jumper on J2 from pin 3 to pin 4 will put 10V on control channel 2

Title		
LED Driver		
Size	Document Number	Rev
A	5_CHANNEL_LED_DRIVER.DSN	A
Date:	Monday, August 08, 2016	Sheet 2 of 7